

MACK FOOTWEAR APPLICATION GUIDE



The background of the page is a detailed technical drawing of a shoe sole, overlaid on a grid. The drawing shows various layers and components of the sole, with labels such as 'ANATOMICAL FLEX', 'OIL RESIST', and 'SLIP RESIST'. There are also numerical values like '0.5MM' and '3.0' indicating specific dimensions or properties. The drawing uses solid and dashed lines to represent different parts and their relationships.

DESIGNED TO ENDURE. MADE TO MOVE. WORN TO PERFORM.

The human foot is an amazing piece of engineering consisting of 20 muscles, 28 bones and 33 joints all with unique functions. The foot performs a number of complex and opposing functions during each step. After heel strike the foot needs flexibility to adapt to uneven terrain and attenuate loading forces, while during push off the foot needs to transform to generate and efficiently transmit power to the ground.

The performance requirements of the foot and ankle are the foundation of our design process. Workplace specific requirements and design features to minimise injuries are overlaid with the performance demands of the foot and ankle. This unique design philosophy is epitomised in our **SYST-M**® stamp.

CONTENTS



04

**MISSION
STATEMENT**

20

**M-WRAP
RANGE**

04

**SUPPORTING
RESEARCH
EXCELLENCE**

24

**TORQUE
RANGE**

06

**PERFORMANCE
SYSTEMS**

28

**TRADE
RANGE**

08

**SAFETY
FEATURES**

32

**LADIES
SAFETY**

10

**FIT
GRID**

34

**LIFESTYLE
SAFETY**

11

**SOLE SELECTION
GRID**

36

**TRACTION
CONTROL
RANGE**

12

**HAZARD
ASSESSMENT
GUIDE**

40

**GUMBOOT
RANGE**

14

**JOB ROLES &
APPLICATIONS
CHART**

42

**MEASURING
CHART**

16

**ADAPT
RANGE**

44

**REFERENCE
CHART**

MISSION STATEMENT

Mack Boots aims to look after the foot, lower limb, and the world around us. Through a continuous process of research, innovation and refinement, we produce occupational footwear that is designed to move and perform with the body.

This not only ensures that our footwear is the most functional possible, but that it also considers the social and environmental factors contributing to a sustainable future.

SUPPORTING RESEARCH EXCELLENCE

Mack Boots is committed to helping improve the health and wellbeing of workers by developing innovative footwear that moves with the body.

To reward excellence in health research, Mack Boots has established an award at the University of Sydney: Faculty of Health Science to acknowledge the exciting work undertaken by emerging health researchers.



PERFORMANCE SYSTEMS



SYST-M®

The performance requirements of the foot and ankle are the foundation of our design process. Workplace specific requirements and design features to minimise injuries are overlaid with the performance demands of the foot and ankle. This unique design philosophy is epitomised in our **SYST-M®** stamp.

M-WRAP™

Medial wrapped midsole design provides rearfoot stability for those that need it. Particularly important for people with flat feet and those that wear orthotics or arch supports.



ADAPT™

Sole unit technology designed to maximise adaption to uneven terrain and reduce injury risks.



modRIDE Technology

The unique midsole technology platform of the modRIDE provides a modulated ride from heel strike to toe off. The sole geometry is engineered to provide reduced resistance to **compression** in zones that need cushioning and increased resistance for **stability** in zones where it is desired.



Hydrodynamic™

Sole shape and tread pattern engineered to optimise fluid dispersion beneath the foot to minimise slips.



articulatedFIT™

Upper design system to allow the natural movement of the foot and ankle from heel strike to toe-off.



asymBEVEL™

Heel shaped to match the natural heel strike position during walking to maximise contact area and provide a smooth ride.



Ortholite®

Breathable memory foam insole that moulds to the foot providing a customised fit and helping to reduce in-shoe friction.



softboard™

Constructed on cushioned foam insole board for a smooth ride.



decoupleGROOVE™

Flex groove along the length of the sole to provide flexibility to allow a smooth transition from initial contact to foot flat and improve terrain adaption.



radiatorTECH™

Manufacturing technique used to improve the breathability of leather and lining materials.



endurelon™

Specifically compounded phylon midsole to improve cushioning rebound characteristics and durability.



cuboidNOTCH™

Sole design feature to provide support on the lateral side, particularly when used with foot orthotics.



exoSHIELD

External TPU welded overlay to be seam free and provide support and durability.



WIDEcap

Wide anatomical shaped toecap to reduce rubbing and nerve impingement.



SAFETY FEATURES





Complies with Australian/New Zealand (AS/NZS 2210.3), European (EN-ISO 20345) and American standards (ASTM F2413-11).



Lightweight, metal-free, nonconductive, insulating and airport friendly safety toecap that complies with Australian/New Zealand (AS/NZS 2210.3), European (EN-ISO 20345) and American standards (ASTM F2413-11).



TPU sole that is hard wearing and highly resistant to hydrolysis, microbial attack, oils, acids and organic fats.



Nitrile rubber sole that is hard wearing and resistant to extreme heat.



Sole slip resistant to soap (SLS) on ceramic tiles.



Sole slip resistant to glycerol on steel plate.



Sole slip resistant to soap (SLS) on ceramic tiles and glycerol on steel plate.



Sole resists breakdown to fuel oil.



Poron® XRD® ultra high impact absorbing foam for protection of the arch of the foot, while having the comfort of a soft foam.



Poron® XRD® ultra high impact absorbing foam to protect the ankle from side impact.



Kevlar® stitching for the ultimate in durability and fire retarding.



Flexible woven synthetic fibre midsole layer to provide protection without compromising performance.



Minimises static electricity build up for safety in volatile environments.



Sole reduces the flow of electric current to protect the wearer from potential electrocution.


Important note: In accordance with ASTM F2413-11 footwear protection should be considered a secondary source of protection. Electrical hazard protection can deteriorate quickly with wear and in the wet.



Footwear lined with a one-way breathable waterproof membrane.



Footwear designed to shed water.



Side zip designed for easy access and quick exit.



Improves durability in high wear zones.



Low profile sole at the toe to reduce the risk of tripping.



Sole design minimises slip risk on ladders.



Upper contains retro-reflective material to improve visibility in low light conditions.

FIT GRID



SOLE SELECTION GRID



HAZARD ASSESSMENT GUIDE



SLIPS

SAFETY SOLUTION

- Uneven surfaces: **ADAPT™** sole unit is designed to maximise adaption to uneven terrain to maintain traction and reduce injury risks.
- Smooth surfaces: Traction Control Range is designed for maximum grip on smooth environments with fluid based slip hazards.

SPRAINS

SAFETY SOLUTION

- **articulatedFIT™** upper to provide targeted support and flexibility to improve adaption to uneven terrain.
- **ADAPT™** range to assist in foot adaption to uneven terrain.

TRIPS & FALLS

SAFETY SOLUTION

- Lightweight footwear to reduce fatigue of the leg muscles that lift the toes.
- **LOWcatchsole** to improve swing phase ground clearance at the toe to reduce the risk of tripping.
- **asymBEVEL™** to match the natural heel strike position during walking to minimise fatigue of the leg muscles that lift the toes.
- **ADAPT™** range to assist in foot adaption to uneven terrain.

HOT CONTACT

SAFETY SOLUTION

- **300°CHeatResistant** nitrile rubber outsole provides protection in high heat environments. Ideal for workers in road construction and other occupations that expose workers to hot surfaces or objects.

FALLING OBJECTS

SAFETY SOLUTION

- **MetGUARD** protects the arch of the foot from falling objects with an impact of 100J. This is roughly equivalent to 20kg being dropped from 0.5m. An ultra-high impact absorbing Poron® XRD® foam provides protection and comfort. **MetGUARD** styles are ideal for workers in resources, construction, machinery maintenance, pump crews and rail.

COMBUSTIBLE MATERIALS

SAFETY SOLUTION

- **ANTI-STATIC** certified footwear minimises static electricity build-up for safety in volatile environments.
- Metal-free footwear can reduce the risk of spark ignition.

SHARP OBJECTS UNDERFOOT

SAFETY SOLUTION

- **PenetrationResistant** styles feature a flexible woven synthetic fibre midsole layer that can resist the penetration of a nail applied at 1,100N of compression.
- Ideal for construction sites and locations with sharp objects on the ground.

ELECTRICAL HAZARDS

SAFETY SOLUTION

- **electricalHAZARD** sole reduces the flow of electric current to protect the wearer from potential electrocution. Important note: In accordance with ASTM F2413-11 footwear protection should be considered a secondary source of protection. **electricalHAZARD** protection can deteriorate quickly with wear and in the wet.

SIDE IMPACT

SAFETY SOLUTION

- **ankleGUARD** an ultra-high impact absorbing Poron® XRD® foam protects the ankle bones from side strike.

ankleGUARD styles are ideal for workers in construction, maintenance and resources.

WATER EXPOSURE

SAFETY SOLUTION

- **WATERPROOF** styles lined with a one-way breathable waterproof membrane to provide additional protection to water resistant leather.

JOB ROLES & APPLICATIONS CHART

MODEL	HAZARDS										JOB ROLES																	
	SLIPS	SPRAINS	TRIPS & FALLS	HOT CONTACT	FALLING OBJECTS	COMBUSTIBLE MATERIALS	SHARP OBJECTS UNDERFOOT	ELECTRICAL HAZARDS	SIDE IMPACT	WATER EXPOSURE	BUILDING & CONSTRUCTION	MINING	OIL & GAS	WELDER / BOILERMAKER	ELECTRICIAN	MECHANICAL	MANUFACTURING	MAINTANANCE	LANDSCAPING	WAREHOUSING & LOGISTICS	AGRICULTURE	TRANSPORT	MACHINERY OPERATORS, TRUCKS, UTILITY, EXCAVATORS	SECURITY	HOSPITALITY	CORPORATE & EXECUTIVES		
GRANITE II	X	X	X	X	X	X	X		X		X	X	X	X	X	X	X	X	X		X	X	X	X				
TERRAPRO ZIP	X	X	X	X		X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
TERRAPRO	X	X	X	X		X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
OCTANE ZIP	X	X	X	X				X			X				X	X	X	X	X	X					X	X	X	
OCTANE	X	X	X	X		X					X	X	X	X	X	X	X	X	X	X								
POWER	X	X	X	X		X					X				X	X	X	X	X	X								
BULLDOG II	X	X	X	X		X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
TITAN II	X	X	X	X				X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
CHASSIS	X	X	X	X			X				X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
ZERO II	X	X	X	X		X			X		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
BARB II	X		X	X		X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
FORCE ZIP	X	X	X			X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
SHIFT ZIP	X	X	X			X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
HUB	X	X	X			X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	
CRUISE (NON SAFETY TOE)	X	X	X			X					X				X	X			X	X	X	X	X	X	X	X	X	



MODEL	HAZARDS										JOB ROLES																
	SLIPS	SPRAINS	TRIPS & FALLS	HOT CONTACT	FALLING OBJECTS	COMBUSTABLE MATERIALS	SHARP OBJECTS UNDERFOOT	ELECTRICAL HAZARDS	SIDE IMPACT	WATER EXPOSURE	BUILDING & CONSTRUCTION	MINING	OIL & GAS	WELDER / BOILERMAKER	ELECTRICIAN	MECHANICAL	MANUFACTURING	MAINTAINANCE	LANDSCAPING	WAREHOUSING & LOGISTICS	AGRICULTURE	TRANSPORT	MACHINERY OPERATORS, TRUCKS, UTILITY, EXCAVATORS	SECURITY	HOSPITALITY	CORPORATE & EXECUTIVES	
TRADE RANGE																											
CARPENTER	X	X	X			X					X	X	X	X	X	X	X	X	X	X	X	X	X	X			
CHIPPY PEN	X	X	X			X	X				X	X	X	X	X	X	X	X	X	X	X	X	X	X			
TRADESMAN	X	X	X			X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X		
TRADIE	X		X			X					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
LADIES SAFETY RANGE																											
AXEL	X	X	X	X				X			X	X	X	X	X	X	X	X	X	X	X	X	X	X			
BROOKLYN	X	X	X	X		X					X	X	X	X	X	X	X	X	X	X	X	X	X	X			
FUEL	X		X			X					X	X	X			X	X	X	X	X	X	X	X	X			
LIFESTYLE SAFETY RANGE																											
VISION	X		X			X									X	X	X	X	X	X	X	X	X				
PRESIDENT	X		X	X																	X				X	X	X
BOSS	X		X	X																	X				X	X	X
TRACTION CONTROL RANGE																											
FLEET (NON SAFETY TOE)	X		X																						X	X	X
TUNED	X		X			X										X	X	X		X		X	X	X	X	X	X
HAUL	X	X	X			X			X						X	X	X	X		X		X		X	X	X	X
PITCH	X		X			X					X				X	X	X		X		X		X	X	X	X	X
GUMBOOT RANGE																											
PUMP	X		X						X		X	X	X		X			X	X		X	X	X				
POUR	X		X				X		X		X	X	X		X			X	X		X	X	X				

ADAPT™ RANGE

The **ADAPT™** range is designed for work on rough terrain. The **ADAPT™** sole technology and **articulatedFIT** system improves adaption to uneven in and optimised movement performance epitomising **SYST-M®**. The lightweight designs minimise fatigue and maximise performance.

PERFORMANCE SYSTEMS

- SYST-M®
- **ADAPT™**
- **articulatedFIT™**
- **asymBEVEL™**
- OrthoLite®
- **decoupleGROOVE™**
- **radiatorTECH™**
- **endurelon™**
- **WIDecap**


SAFETY FEATURES



OCTANE ZIP

The combination of electrical HAZARD certification and the performance features of the ADAPT™ Range makes the Octane Zip ideal for electricians and construction workers that work on uneven surfaces and can be exposed to electric currents. ZIP closure provides easy access and a quick exit in emergencies.

SAFETY FEATURES

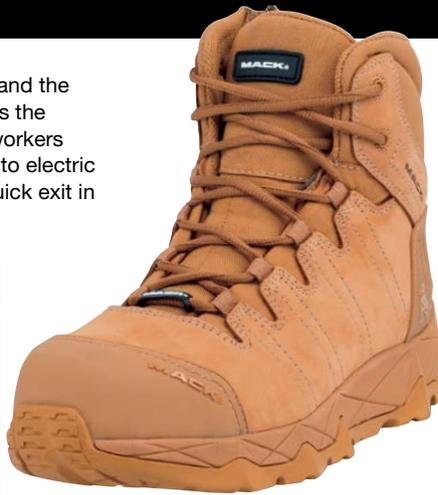

MKOOCTANEZ

SIZES HONEY
4-14
1/2 SIZES 6.5-10.5
BLACK
6-14
1/2 SIZES 6.5-10.5
HEIGHT
160^{mm}
WEIGHT
670^g

COLOURS



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black), Nubuck Leather (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB SRC HRO) • EN - ISO 20345 (SB SRC HRO) • ASTM F2413 - 11 (M/1/75/C/75/EH)

OCTANE

Anterior and posterior ankle flexibility and lightweight design make the OCTANE ideal for workers that clock up big mileage, either over rough terrain or while operating machinery.

SAFETY FEATURES



MKOOCTANE

SIZES BLACK
4-14
HONEY & BROWN
6-14
1/2 SIZES 6.5-10.5
HEIGHT
160^{mm}
WEIGHT
655^g

COLOURS



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black & Rocky), Nubuck Leather (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB SRC HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M/1/75/C/75/SD)

GRANITE II

Built for work on rough terrain the GRANITE II protects against impacts from above, below and the side, making it ideal for workers in construction, resources and machine maintenance.

SAFETY FEATURES



MKGRANIT2

SIZES HONEY
6-15
1/2 SIZES 6.5-10.5
BLACK
4-15
1/2 SIZES 6.5-10.5
HEIGHT
180^{mm}
WEIGHT
750^g

COLOURS




OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black), Nubuck Leather (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC P M AN HRO) • EN - ISO 20345 (S1 SRC P M AN HRO) • ASTM F2413 - 11 (M/1/75/C/75/SD/PR/Mt) (M/1/75/C/75/EH)

TERRAPRO

Optimised for adaption to uneven terrain, the TerraPro is ideal for off-road workers requiring additional boot height.

SAFETY FEATURES

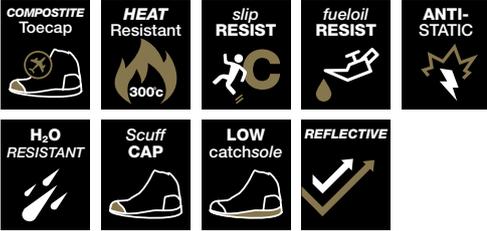

MKTERRAPR

SIZES
4-13
1/2 SIZES 6.5-10.5
HEIGHT
180^{mm}
WEIGHT
695^g

COLOURS

HONEY




OUTSOLE: Nitrile Rubber **UPPER:** Nubuck Leather (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M/I/75/C/75/S/D)

TERRAPRO ZIP

TerraPro Zip is ideal for workers that might need a quick exit due to sparks and water hazards or just want the ease of access, with the performance features of the ADAPT™ Range.

SAFETY FEATURES

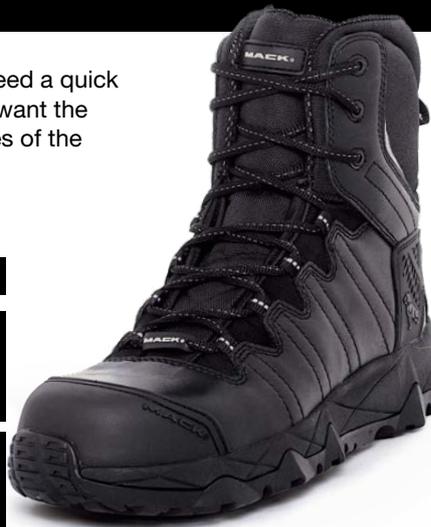

MKTERRPRZ

SIZES
HONEY
4-15
1/2 SIZES 6.5-10.5
BLACK
6-15
1/2 SIZES 6.5-10.5
HEIGHT
180^{mm}
WEIGHT
705^g

COLOURS

HONEY BLACK




OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black), Nubuck Leather (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M/I/75/C/75/S/D)

POWER

POWER is designed for workers that need the toughness of a boot, while requiring the ankle mobility of a shoe. Ideal for drivers and people walking big distances on tough terrain.

SAFETY FEATURES

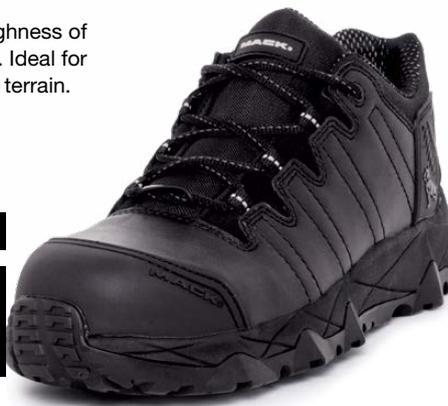

MK00POWER

SIZES
4-13
1/2 SIZES 6.5-10.5
WEIGHT
605^g

COLOURS

BLACK



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB SRC HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M/I/75/C/75/S/D)



M-WRAP™ RANGE

The M-WRAP™ range is engineered to provide targeted medial support on the inside of the foot, while integrating classic styling with modern innovation. The M-WRAP™ sole unit is modelled on foot movement patterns for optimised traction and performance on a firm surface.

PERFORMANCE SYSTEMS

- SYST-M®
- M-WRAP™
- Hydrodynamic™
- asymBEVEL™
- cuboidNOTCH™
- OrthoLite®
- decoupleGROOVE™
- radiatorTECH™
- endurelon™
- WIDEcap

SAFETY FEATURES



300° heat resistant nitrile sole



Premium full grain & nubuck leather with articulated FIT design allows for natural movement while offering support

asymBEVEL heel for a smoother ride when walking

M-Wrap medial wrapped midsole provides rear foot stability. Ideal for those with flat feet.




Ortholite breathable memory foam insole

BULLDOG II

BULLDOG II maintains the classic looks with anatomically engineered performance making the BULLDOG II ideal for those looking for high performing style.

SAFETY FEATURES

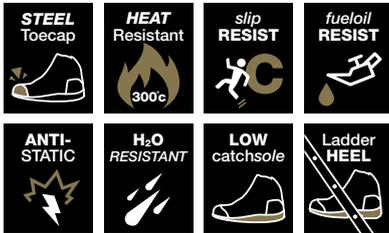

MKBULLDO2

SIZES
HONEY/ROCKY
6-15
1/2 SIZES 6.5-10.5
BLACK
4-15
1/2 SIZES 6.5-10.5
HEIGHT
165^{mm}
WEIGHT
705^g

COLOURS



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black & Rocky), Nubuck Leather (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M1/75/C/75/SD)

CHASSIS

The CHASSIS is purpose built for those exposed to sharp objects and hot material in construction and heavy industries. Combining Kevlar® stitching and fire retardant lacing, full leather upper and **PenetrationResistant** midsole, the CHASSIS is ideal for workers exposed to sparks and other hot material.

SAFETY FEATURES



MKCHASSIS

SIZES
6-14
1/2 SIZES 6.5-10.5
HEIGHT
178^{mm}
WEIGHT
770^g

COLOURS



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black), Nubuck Leather (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB SRC P HRO) • EN - ISO 20345 (SB SRC P HRO) • ASTM F2413 - 11 (M1/75/C/75/PR)

TITAN II

Modern innovation and technology is hidden behind the classic styling of the TITAN II. Being completely metal-free and **electricalHAZARD** certified the TITAN II is ideal for electricians and other workers exposed to electric currents.

SAFETY FEATURES



MKOTITAN2

SIZES
6-14
1/2 SIZES 6.5-10.5
HEIGHT
160^{mm}
WEIGHT
620^g

COLOURS



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black), Nubuck Leather (Honey)


APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB HRO SRC) • EN - ISO 20345 (SB HRO SRC) • ASTM F2413 - 11 (M1/75/C/75/EH)

ZERO II

WATERPROOF and lightweight lace up boot to keep feet dry and workers full of energy. The ZERO II is popular with ground crews, road teams, landscapers, the aviation industry and workers who spend their days out in the elements.

SAFETY FEATURES

WATER PROOF 	COMPOSITE Toecap 	HEAT Resistant 300c 	slip RESIST 	fueloil RESIST
ANTI-STATIC 	H₂O RESISTANT 	LOW catchsole 	Ladder HEEL 	Scuff CAP

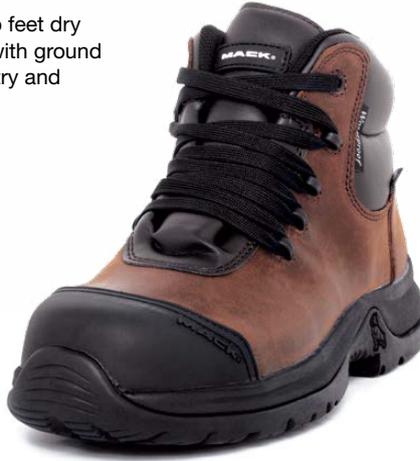

MK00ZERO2

SIZES 6-14
1/2 SIZES 6.5-10.5
HEIGHT 145^{mm} 4^{1/2}
WEIGHT 620^g

COLOURS



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black & Rocky)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC WR HRO) • EN – ISO 20345 (S1 SRC WR HRO) • ASTM F2413 – 11 (M/I/75/C/75/SD)

FREEWAY MET

Designed for the specific work requirements of processing plants, pump teams and offshore workers. The FREEWAY MET will keep workers safe and dry.

SAFETY FEATURES

WATER PROOF 	COMPOSITE Toecap 	HEAT Resistant 300c 	slip RESIST 	fueloil RESIST
ANTI-STATIC 	H₂O RESISTANT 	LOW catchsole 	Ladder HEEL 	Penetration RESISTANT
Scuff CAP 	Met GUARD 	ZIP closure 		



MKFREEMET

SIZES 6-14
1/2 SIZES 6.5-10.5
HEIGHT 240^{mm} 9^{5/8}
WEIGHT 820^g

COLOURS



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC P M WR HRO) • EN – ISO 20345 (S1 SRC P M WR HRO) • ASTM F2413 – 11 (M/I/75/C/75/SD/PR/Mt)

BARB II

The unique upper design brings the articulatedFIT™ concept to a double gusset boot to minimise wear-in time.

SAFETY FEATURES



MK00BARB2

SIZES
4-15
1/2 SIZES 6.5-10.5
HEIGHT
150^{mm}
WEIGHT
595^g

COLOURS

BLACK



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC WR HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M/I/75/C/75/SD)

RIDER II

Classically styled slip-on double elastic gusset boot with a high heat resistance rubber outsole, makes the Rider II ideal for workers exposed to hot material.

SAFETY FEATURES



MKORIDER2

SIZES
6-13
1/2 SIZES 6.5-10.5
HEIGHT
150^{mm}
WEIGHT
635^g

COLOURS

ROCKY



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Rocky)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M/I/75/C/75/SD)

RIGGER II

The RIGGER II is purpose built for petroleum, petrochemical, welders, boilermakers, riggers and other workers who need lace free protection.

SAFETY FEATURES



MKRIGGER2

SIZES
6-13
HEIGHT
280^{mm}
WEIGHT
790^g

COLOURS

ROCKY



OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Rocky)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC HRO) • EN - ISO 20345 (S1 SRC HRO) • ASTM F2413 - 11 (M/I/75/C/75/SD)

TORQUE RANGE

The *Torque* range is designed for workers requiring comfort and versatility in their safety footwear. The boots combine a unique PU cushioned midsole, TPU outsole, premium full grain leather and an integrated ScuffCAP for durability.

The range performs well on both rough and flat terrains and the fitting profile also suits those with wider feet.

PERFORMANCE SYSTEMS

- asymBEVEL™
- ADAPTruss
- decoupleGROOVE™
- WIDEcap

SAFETY FEATURES




NEW
MODRIDE
MIDSOLE
TECHNOLOGY



FORCE ZIP

The easy access ZIP closure of the FORCE ZIP makes it ideal for workers exposed to sparks or required to remove their boots multiple times a day. The ScuffCAP improves durability to ensure that the boots comply with standards for as long as possible.

SAFETY FEATURES

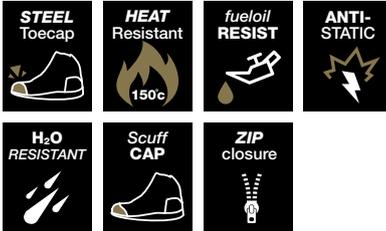

MK0FORCEZ

SIZES
4-13
1/2 SIZES 6.5-10.5
HEIGHT
162^{mm}
WEIGHT
815^g

COLOURS



OUTSOLE: TPU **UPPER:** Premium Full Grain Leather (Black), Premium Nubuck Leather (Honey)
APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1) • EN - ISO 20345 (S1 SRA) • ASTM F2413 - 11 (M/I/75/C/75/SD)

FORCE

Ideal for workers in the resources and construction industries that spend all day in their boots. The FORCE incorporates a cushioned PU midsole and insole and wraps the foot in high grade full grain leather upper for comfort, breathability and durability. The ScuffCAP improves durability.

SAFETY FEATURES



MK00FORCE

SIZES
4-13
1/2 SIZES 6.5-10.5
HEIGHT
162^{mm}
WEIGHT
775^g

COLOURS




OUTSOLE: TPU **UPPER:** Premium Full Grain Leather (Black), Premium Nubuck Leather (Honey)
APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1) • EN - ISO 20345 (S1 SRA) • ASTM F2413 - 11 (M/I/75/C/75/SD)

SHIFT ZIP

SHIFT ZIP is a low-cut hiker style ankle boot with an industrial grade zipper. A popular 100% comfortable choice for Warehouse Staff, Construction and Courier Drivers. The boot also features a heat resistant TPU outsole to 150°C and features ballistic nylon in the upper for improved breathability.

SAFETY FEATURES

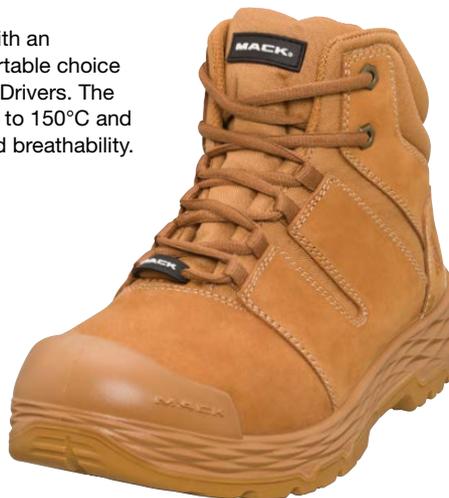

MK0SHIFTZ

SIZES
4-13
1/2 SIZES 6.5-10.5
HEIGHT
145^{mm}
WEIGHT
635^g

COLOURS




OUTSOLE: TPU **UPPER:** Premium Nubuck Leather (Honey) / Ballistic Nylon
APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1) • EN - ISO 20345 (S1 SRA) • ASTM F2413 - 11 (M/I/75/C/75/SD)

HUB

Classic slip-on double gusseted boot with a ScuffCAP to improve durability, making the HUB ideal for workers that have to kneel as part of their work routine. Suitable for plumbers, electricians, mechanics and workers that complete work in hard to reach places.

SAFETY FEATURES

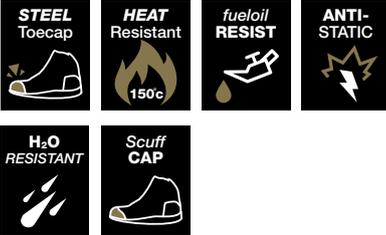

MK0000HUB

SIZES
4-13
1/2 SIZES 6.5-10.5
HEIGHT
132^{mm}
WEIGHT
623^g

COLOURS

CLARET




OUTSOLE: TPU **UPPER:** Premium Full Grain Leather (Claret)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1) • EN - ISO 20345 (S1 SRA) • ASTM F2413 - 11 (M/I/75/C/75/SD)

CRUISE

A stylish, comfortable slip-on double gusset boot that is ideal for work on the farm, garden or other non-safety work environments.

SAFETY FEATURES

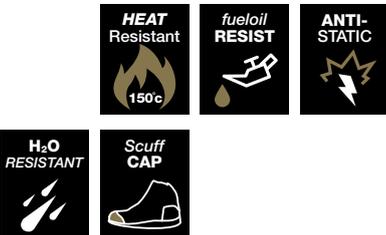

NON SAFETY BOOT



MK0CRUISE

SIZES
4-13
1/2 SIZES 6.5-10.5
HEIGHT
150^{mm}
WEIGHT
590^g

COLOURS

CLARET



OUTSOLE: TPU **UPPER:** Premium Full Grain Leather (Claret)

APPROVED STANDARDS • AS/NZS 2210.3 (SRA) • ASTM F2413 - 11 (SD)



TRADE RANGE

Designed for the diverse tasks undertaken by tradesmen. The TRADE RANGE are comfortable and versatile boots at an attractive price point.

PERFORMANCE SYSTEMS

- WIDEcap

SAFETY FEATURES



Rugged, high slip resistant and 150° heat resistant sole



Heavy duty metal eyelets for laces

Soft ankle collar for added support and comfort

Full high grade leather upper



Steel toecap



CARPENTER

Designed for tradesmen, apprentices and workers who take their boots off multiple times a day. The CARPENTER is a stylish boot at an attractive price point which features zip access saving workers time during the day to maximise time on the job.

SAFETY FEATURES



MKCARPENT

SIZES 6-14
1/2 SIZES 6.5-10.5
HEIGHT 154^{mm}
WEIGHT 700^g

COLOURS

HONEY



OUTSOLE: TPU **UPPER:** Split Leather (Suede) (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC) • EN - ISO 20345 (S1 SRC) • ASTM F2413 - 11 (MI/I75/C/75/SD)

CHIPPY PEN

Designed to ensure protection from danger coming from above and below. Ideal for the construction industry and other workers exposed to sharp objects.

SAFETY FEATURES



MKCHIPPYP

SIZES 5-16
1/2 SIZES 6.5-10.5
HEIGHT 130^{mm}
WEIGHT 680^g

COLOURS

HONEY



OUTSOLE: TPU **UPPER:** Split Leather (Suede) (Honey)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC) • EN - ISO 20345 (S1 P SRC) • ASTM F2413 - 11 (MI/I75/C/75/SD/PR)

TRADIE

Slip-on double gusset boot ideal for the tradesman wanting bang for their buck. The TPU outsole provides improved resistance to hydrolysis, microbial attack, oils, acids and organic fats compared to dual density PU soles.

SAFETY FEATURES



MKOTRADIE

SIZES 4-16
1/2 SIZES 6.5-10.5
HEIGHT 132^{mm}
WEIGHT 623^g

COLOURS

CLARET



OUTSOLE: TPU **UPPER:** Pebble Leather (Black)


APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1) • EN - ISO 20345 (S1 SRC) • ASTM F2413 - 11 (MI/I75/C/75/SD)

TRADESMAN

MK0TRADES

This lace up safety boot provides additional ankle stability at an attractive price point, making it ideal for apprentices and part-timers. The TPU outsole provides improved resistance to hydrolysis, microbial attack, oils, acids and organic fats compared to dual density PU soles.

SAFETY FEATURES

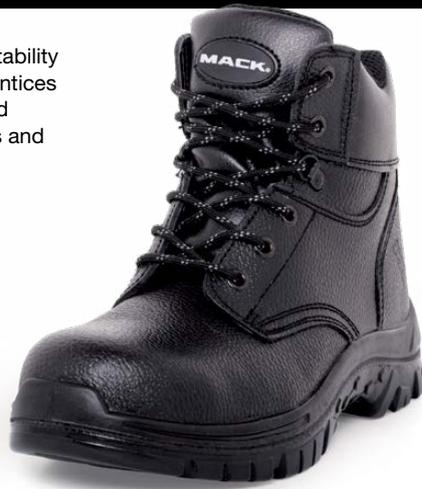

SIZES
4-16
1/2 SIZES 5.5-10.5
HEIGHT
154^{mm}
WEIGHT
690^g

COLOURS

BLACK



OUTSOLE: TPU **UPPER:** Pebble Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC) • EN - ISO 20345 (S1 SRC) • ASTM F2413 - 11 (MI/75/C/75/SD)





LADIES SAFETY

The women's specific ladies range is designed to provide a cross section of fitting profiles for different foot shapes and a variety of industry applications.

*Ladies sizes are in US Sizes.

US SIZING FOR LADIES

PERFORMANCE SYSTEMS

- SYST-M®
- *decouple*GROOVE™
- asymBEVEL™
- WIDEcap

SAFETY FEATURES



300° heat resistant sole for hot environments



fuel and oil resistant sole

Latest trend colours



Safety Toecap



Premium full grain leather upper

High slip resistant sole





Ortholite breathable memory foam insole (not included in Fuel)

AXEL

Smooth styling of the AXEL is combined with a functional design to provide targeted medial support for women working on a firm surface. The AXEL is also completely metal-free and **electrical/HAZARD** certified making it the ideal boot for women who could be exposed to electric currents.

SAFETY FEATURES

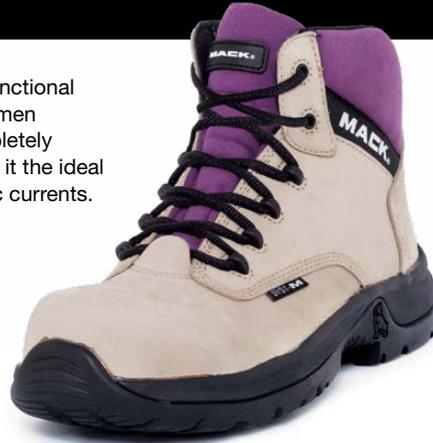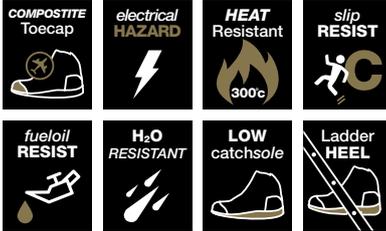

AXEL

US SIZES
6-12
1/2 SIZES 6.5-9.5
HEIGHT
152^{mm}
WEIGHT
610^g



COLOURS



ADDITIONAL FEATURES

- OrthoLite® • M-WRAP™ • Hydrodynamic™ • cuboidNOTCH™
- softboard™ • radiatorTECH™ • endurelon™


OUTSOLE: Nitrile Rubber **UPPER:** Split leather (Suede) (Fawn)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB HRO SRC) • EN - ISO 20345 (Class I SB HRO SRC) • ASTM F2413 - 11 (F/I/75/C/75/EH)

BROOKLYN

Classic looks with anatomically engineered performance makes the BROOKLYN ideal for female workers looking for high performance and style.

SAFETY FEATURES

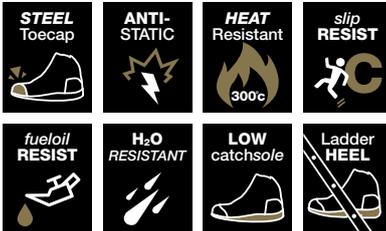

MKBROOKLY

US SIZES
6-12
1/2 SIZES 6.5-9.5
HEIGHT
165^{mm}
WEIGHT
735^g



COLOURS



ADDITIONAL FEATURES

- OrthoLite® • M-WRAP™ • Hydrodynamic™ • cuboidNOTCH™
- softboard™ • radiatorTECH™ • endurelon™

OUTSOLE: Nitrile Rubber **UPPER:** Nubuck Leather (Navy)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 HRO SRC) • EN - ISO 20345 (Class I S1 HRO SRC) • ASTM F2413 - 11 (F/I/75/C/75/SD)

FUEL

Ultra-lightweight highly slip resistant slip-on double gusset safety boot for female workers exposed to slippery environments and work in light industrial environments. The FUEL is ideal for women working in the food processing, hospitality, cleaning and light industrial sectors.

SAFETY FEATURES



MK000FUEL

US SIZES
6-12
1/2 SIZES 6.5-9.5
HEIGHT
165^{mm}
WEIGHT
503^g



COLOURS



ADDITIONAL FEATURES

- WIDEcap • Hydrodynamic™

OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC) • EN - ISO 20345 (Class I S1 SRC) • ASTM F2413 - 11 (F/I/75/C/75/SD)

LIFESTYLE SAFETY

Designed for workers that want stylish safety footwear that is designed to fit and worn to perform throughout the day. The range is ideal for site managers, engineers, foremen and those involved in light industrial applications including warehousing and transport.

PERFORMANCE SYSTEMS

- WIDEcap

SAFETY FEATURES

COMPOSITE
Toecap



fuel/oil
RESIST




LOW
catchsole




VISION

Lightweight athletic safety shoe designed specifically for light industry including warehousing, transport and garbage collectors who clock up big miles on their feet with minimal wear and tear on their footwear. The heat welded **exoSHIELD** upper ensures a seamfree upper for maximum comfort and durability.

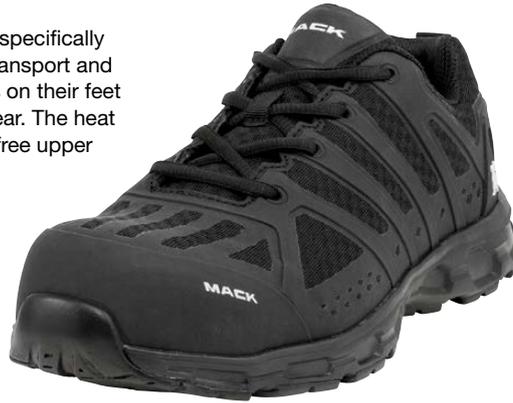

SAFETY FEATURES

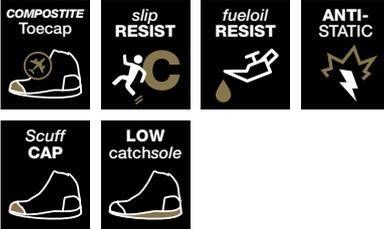

ADDITIONAL FEATURES

- SYST-M®
- articulatedFIT™
- **exoSHIELD**
- WIDecap

OUTSOLE: Nitrile Rubber **UPPER:** Synthetic Mesh with TPU

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC) • EN – ISO 20345 (Class I S1 SRC) • ASTM F2413 – 11 (M/1/75/C/75/SD)

MKOVISION

SIZES
4-13
WEIGHT
489^g

COLOURS

BLACK



PRESIDENT

Lightweight slip-on business styled safety shoe ideal for situations where laces can become contaminated or to provide a sleek fashionable style. Suitable for site managers, engineers, foremen and the food processing sector that desire the functionality of a shoe but need it to be lace free.



SAFETY FEATURES



ADDITIONAL FEATURES

- SiliconeGELInnersole
- **endurelon™**

OUTSOLE: Nitrile Rubber **UPPER:** Synthetic Mesh with TPU

APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB SRA) • EN – ISO 20345 (Class I SB SRA) • ASTM F2413 – 11 (M/1/75/C/75)

MKPRESIDE

SIZES
4-13
1/2 SIZES 5.5-11.5
WEIGHT
500^g

COLOURS

BLACK



BOSS

Executive styled lightweight safety shoe that looks the part while in the office and performs on site. Ideal for site managers, engineers, foremen and other workers that split their time between the office, factory or site.



SAFETY FEATURES



ADDITIONAL FEATURES

- SiliconeGELInnersole
- **Anti-torsionSole**
- **TRACTIONSole**
- **PHYLONMidsole**

OUTSOLE: Nitrile Rubber **UPPER:** Full Grain Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I SB SRA) • EN – ISO 20345 (Class I SB SRA) • ASTM F2413 – 11 (M/1/75/C/75)

MK000BOSS

SIZES
4-14
1/2 SIZES 7.5-10.5
WEIGHT
610^g

COLOURS

BLACK



TRACTION CONTROL RANGE

Designed to maximise grip from initial contact to toe-off, the Traction Control Range is ideal for slippery environments including cleaning, hospitality, food processing, roofing and healthcare sectors. The asymBEVEL™ and Hydrodynamic™ systems in the Traction Control Range are designed to maximise ground contact area and disperse fluid from the ground shoe interface throughout the gait cycle.

PERFORMANCE SYSTEMS

- SYST-M®
- asymBEVEL™
- WIDCap
- decoupleGROOVE™
- Hydrodynamic™

SAFETY FEATURES




PITCH

MK00PITCH

Designed for the unique requirements of working on the roof. The PITCH features pressure dispersion panels on the lateral side of the foot, key adaption zones in the mid and ball of the foot, a sole unit designed to maximise traction and adaption to the contours of the roof, all without sacrificing comfort. Also suitable for hospitality, food processing and light industrial sectors.

SAFETY FEATURES

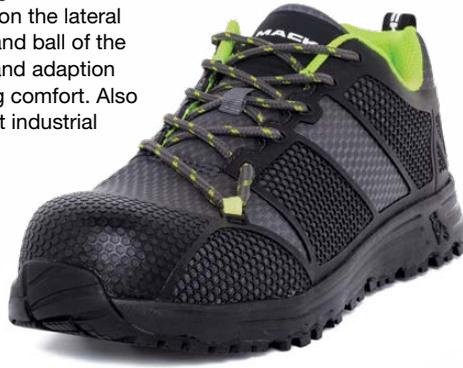

SIZES
6-14
1/2 SIZES 6.5-10.5
WEIGHT
443^g

COLOURS



ADDITIONAL FEATURES

- articulatedFIT™
- exoSHELL
- WIDECAP

OUTSOLE: Rubber **UPPER:** Synthetic



APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC) • EN - ISO 20345 (Class I S1 SRC) • ASTM F2413 - 11 M/I/75/C/75/SD



HAUL

Ultra-lightweight **WATERPROOF** slip resistant safety boot for workers that are exposed to wet and slippery environments. Ideal for workers in the food processing, hospitality, cleaning and light industrial sectors.

SAFETY FEATURES

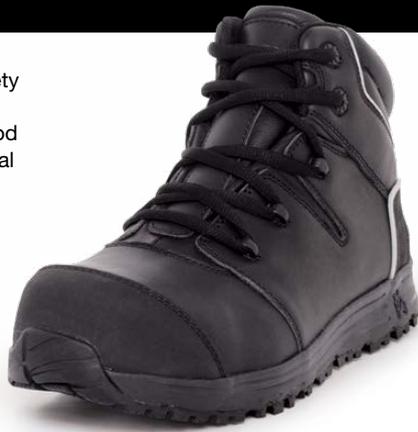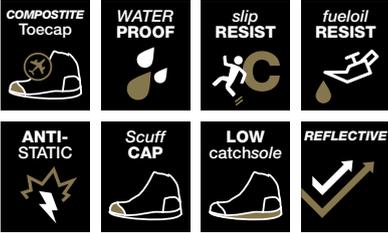

ADDITIONAL FEATURES
 • articulatedFIT™ • WIDecap

MK000HAUL

SIZES
6-13
1/2 SIZES 6.5-10.5
HEIGHT
135^{mm}
WEIGHT
565^g

COLOURS

BLACK



OUTSOLE: Rubber **UPPER:** Full Grain Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 WR SRC) • EN - ISO 20345 (Class I S1 WR SRC) • ASTM F2413 - 11 (M/I/75/C/75/SD)

TUNED

Ultra-lightweight slip resistant slip-on double gusset safety boot for workers that are exposed to slippery environments. Ideal for workers in the food processing, hospitality, cleaning and light industrial sectors. The white and black colour options make the TUNED ideal for food processing sectors seeking to prevent cross contamination.

SAFETY FEATURES



MK00TUNED

SIZES
4-13
1/2 SIZES 6.5-10.5
HEIGHT
132^{mm}
WEIGHT
623^g

COLOURS

BLACK WHITE



OUTSOLE: Rubber **UPPER:** Full Grain Leather (Black)

APPROVED STANDARDS • AS/NZS 2210.3 (Class I S1 SRC) • EN - ISO 20345 (S1 SRC) • ASTM F2413 - 11 (M/I/75/C/75/SD)



HAUL - MEN'S TRACTION CONTROL RANGE

GUMBOOT RANGE

MACK's PVC Gumboot range are suitable for any application. High durability and all day comfort are ideal for workers exposed to wet environments with dangerous sharp objects. Wide fitting and a heavy-duty tread for extra stability with the outsole pattern.

MACK's Pour & Pump outsole design also resists clogging, providing all day grip and support in most environments.

The design features a metatarsal bump protection, medial, lateral and heel bump protection. The back of boot heel kick off wedge aids in getting out of the gumboots with ease.

PERFORMANCE SYSTEMS

- WIDEcap

SAFETY FEATURES



POUR

Designed for tough environments the POUR is ideal for construction workers, concreters and other workers exposed to sharp objects in wet environments. The POUR also combines a cushioned PU insole for comfort.

SAFETY FEATURES

STEEL Toecap 	Penetration RESISANT 	WATER PROOF 	slip RESIST 	fueloil RESIST 
Ladder HEEL 	PUInnersole			



MK000POUR

SIZES
6-13
HEIGHT
330^{mm}_{13^{3/4}}
WEIGHT
1,300 g

COLOURS

BLACK



OUTSOLE: PVC **UPPER:** PVC

APPROVED STANDARDS • AS/NZS 2210.3 (Class II SB P SRA) • EN – ISO 20345 (Class II SB P SRA) • ASTM F2413 – 11 (M/I/75/C/75/PR)

PUMP

Ideal for workers that need a durable and comfortable safety gumboot. The PUMP also combines a cushioned PU insole for a soft underfoot feel.

SAFETY FEATURES

STEEL Toecap 	slip RESIST 	fueloil RESIST 	WATER PROOF 
Ladder HEEL 	PUInnersole		



MK000PUMP

SIZES
5-13
HEIGHT
330^{mm}_{13^{3/4}}
WEIGHT
1,230 g

COLOURS

BLACK



OUTSOLE: PVC **UPPER:** PVC

APPROVED STANDARDS • AS/NZS 2210.3:2009 (Class II SB SRA) • EN – ISO 20345:2012 (Class II SB SRA) • ASTM F2413 – 11 (M/I/75/C/75)



MENS AND LADIES FOOTWEAR SIZING CHART

UK/AUS SIZE	2	3	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	12	13	14	15	
EURO SIZE	36	37	38	38.5	39	39.5	40	40.5	41	41.5	42	42.5	43	43.5	44	44.5	45	46	47	48	49	
MENS USA SIZE	3	4	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	13	14	15	16	
LADIES USA SIZE			6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12							

All footwear sold and distributed in or from Australia is based on a UK size. Ladies sizes are two sizes larger than UK sizes. All Mack safety footwear is independently certified to major international safety standards.





PERFORMANCE REFERENCE CHART

	SYST-M®	M-WRAP™	ADAPT™	Hydrodynamic™	articulatedFIT™	asymBEVEL™
ADAPT RANGE						
OCTANE ZIP	X		X		X	X
OCTANE	X		X		X	X
GRANITE II	X		X		X	X
TERRAPRO	X		X		X	X
TERRAPRO ZIP	X		X		X	X
POWER	X		X		X	X
M-WRAP RANGE						
BULLDOG II	X	X		X		X
CHASSIS	X	X		X		X
TITAN II	X	X		X		X
ZERO II	X	X		X		X
FREEWAY MET	X	X		X		X
BARB II	X	X		X	X	X
RIDER II	X	X		X		X
RIGGER II	X	X		X		X
TORQUE RANGE						
FORCE ZIP			X			X
FORCE			X			X
SHIFT ZIP			X			X
HUB			X			X
CRUISE			X			X
TRADE RANGE						
CARPENTER						
CHIPPY PEN						
TRADIE						
TRADESMAN						
LADIES SAFETY						
AXEL	X	X		X		X
BROOKLYN	X	X		X		X
FUEL	X			X		X
LIFESTYLE SAFETY RANGE						
VISION	X				X	
PRESIDENT						
BOSS						
TRACTION CONTROL RANGE						
PITCH	X			X	X	X
HAUL	X			X	X	X
TUNED	X			X		X
GUMBOOT RANGE						
POUR						
PUMP						

Ortholite®	softboard™	decouple-GROOVE™	radiatorTECH™	endurelon™	cuboidNOTCH™	exoSHIELD	WIDEcap
X	X	X	X	X			X
X	X	X	X	X			X
X	X	X	X	X			X
X	X	X	X	X			X
X	X	X	X	X			X
X	X	X	X	X			X
X	X	X	X	X	X		X
X	X	X	X	X	X		X
X	X	X	X	X	X		X
X	X	X	X	X	X		X
X	X	X	X	X	X		X
X	X	X	X	X	X		X
X	X	X	X	X	X		X
	X	X	X				X
	X	X	X				X
	X	X	X				X
	X	X	X				X
	X	X	X				X
							X
							X
							X
							X
X	X	X	X	X	X		X
X	X	X	X	X	X		X
		X					X
						X	X
						X	X
		X				X	X
		X					X
		X					X
							X
							X

SAFETY REFERENCE CHART

STYLE	APPROVED STANDARDS		Safety	STEEL-Toecap	COMPOSITE Toecap	150°C Heat Resistant	300°C Heat Resistant	slip RESIST-A	slip RESIST-B	slip RESIST-C
	EN ISO 20345 AUS/NZS 2210.3	ASTM F2413-11								
ADAPT RANGE										
OCTANE ZIP	SB SRC HRO	M/175/C/75/EH	X		X		X	X	X	X
OCTANE	S1 SRC HRO	M/175/C/75/SD	X		X		X	X	X	X
GRANITE II	S1 SRC P M AN HRO	M/175/C/75/SD/PR/MT	X		X		X	X	X	X
TERRAPRO	S1 SRC HRO	M/175/C/75/SD	X		X		X	X	X	X
TERRAPRO ZIP	S1 SRC HRO	M/175/C/75/SD	X		X		X	X	X	X
POWER	S1 SRC HRO	M/175/C/75/SD	X		X		X	X	X	X
M-WRAP RANGE										
BULLDOG II	S1 HRO SRC	M/175/C/75/SD	X	X			X	X	X	X
CHASSIS	SB P HRO SRC	M/175/C/75/PR	X	X			X	X	X	X
TITAN II	SB HRO SRC	M/175/C/75/EH	X		X		X	X	X	X
ZERO II	S1 WR HRO SRC	M/175/C/75/SD	X		X		X	X	X	X
FREEWAY MET	S1 WR HRO P M SRC	M/175/C/75/SD/PR/MT	X		X		X	X	X	X
BARB II	S1 SRC HRO	M/175/C/75/SD	X		X		X	X	X	X
RIDER II	S1 HRO SRC	M/175/C/75/SD	X	X			X	X	X	X
RIGGER II	S1 HRO SRC	M/175/C/75/SD	X	X			X	X	X	X
TORQUE RANGE										
FORCE ZIP	S1 SRC	M/175/C/75/SD	X	X		X		X		
FORCE	S1 SRC	M/175/C/75/SD	X	X		X		X		
SHIFT ZIP	S1 SRC	M/175/C/75/SD	X	X		X		X		
HUB	S1 SRC	M/175/C/75/SD	X	X		X		X		
CRUISE	S1 SRC	M/175/C/75/SD				X		X		
TRADE RANGE										
CARPENTER	S1 SRC	M/175/C/75/SD	X	X		X		X	X	X
CHIPPY PEN	S1 SRC P	M/175/C/75/SD/PR	X	X		X		X	X	X
TRADIE	S1 SRC	M/175/C/75/SD	X	X		X		X	X	X
TRADESMAN	S1 SRC	M/175/C/75/SD	X	X		X		X	X	X
LADIES SAFETY										
AXEL	SB HRO SRC	F/175/C/75/EH	X		X		X	X	X	X
BROOKLYN	S1 HRO SRC	F/175/C/75/SD	X	X			X	X	X	X
FUEL	S1 SRC	F/175/C/75/SD	X		X			X	X	X
LIFESTYLE SAFETY RANGE										
VISION	S1 SRC	M/175/C/75/SD	X		X			X	X	X
PRESIDENT	SB SRA	M/175/C/75	X		X		X	X		
BOSS	SB SRA	M/175/C/75	X		X		X	X		
TRACTION CONTROL RANGE										
PITCH	S1 SRC	M/175/C/75/SD	X		X			X	X	X
HAUL	S2 WR SRC	M/175/C/75/SD	X		X			X	X	X
TUNED	S2 SRC	M/175/C/75/SD	X		X			X	X	X
GUMBOOT RANGE										
POUR	SB SRA P		X	X		X		X		
PUMP	SB SRA		X	X		X		X		



**DESIGNED
TO ENDURE.
MADE TO
MOVE.
WORN TO
PERFORM.**

MACKBOOTS.COM.AU | 1300 350 216

DEC 2020 Mack Footwear is sold under licence from Mack Trucks, Inc. All rights reserved. *Weight disclaimer: Footwear weights are based on a men's UK8 for a single shoe or boot and a ladies USA10 for ladies shoes. Due to the nature of manufacturing there will be subtle variation between pairs. Disclaimer: Every reasonable effort has been made to ensure the accuracy of the product information in this document. This document must not be regarded as an infallible guide. **Mack Boots™** accepts no responsibility in this regard. As product details may change from time to time please contact **Mack Boots™** to gain the latest information.